DA 4248 V D Puristic Varia
Island cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



- Timeless design – stainless steel canopy 1198 mm wide
- Unique user convenience – Con@ctivity
- Always at the right height – motorised height adjustment
- Powerful – 675 m3/h in Booster level
- Pleasantly quiet – Miele Silence package

EAN: 4002515945506 / Material number: 10767370 / Old Material Number: 28424855D

General information	
Model identifier	DA 4248 V D Puristic Varia
Manufacturer material number	10767370
EAN number	4002515945506
Marketing class	Platinum
Construction type	
Island cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Exhaust air
User convenience	
Miele@home	•
Automatic function	Con@ctivity 3,0
Electronic controls	•
Con@ctivity	Yes
Controls	Light-touch switches with LEDs
Miele@mobile app	•
Power levels (number without Booster level)	3
Run-on time 5/15 min.	•
Booster levels	1
Grease filter saturation indicator	•
Silence package	•
Motor-operated cooker hoods	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A+
Annual energy consumption in kWh/year	30,8
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	30,8
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	6
Lighting	
Number x W	4 x 3 W
Light intensity in Lx	600 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•

DA 4248 V D Puristic Varia
Island cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515945506 / Material number: 10767370 / Old Material Number: 28424855D

Exhaust air	
Air throughput in Level 1 (m^3/h) according to EN 61591	180
Air throughput in Level 2 (m^3/h) according to EN 61591	290
Air throughput in Level 3 (m^3/h) according to EN 61591	420
Air throughput in Booster level 1 (m^3/h) according to EN 61591	675
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	39,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	49,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	58,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	70,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	24,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	34,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	43,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	55,0
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	1198
Overall height for vented and external in in. (mm)	755
Overall height for extraction mode and external mode cooker hoods in mm	1045
Canopy height in mm	70
Canopy depth in mm	698
Net weight in kg	45,0
Hard-wired connection	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0,29
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Combination with WiFi-enabled Miele hob	recommended
Accessories included	
Non-return flap	•

DA 4248 V D Puristic Varia
Island cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.

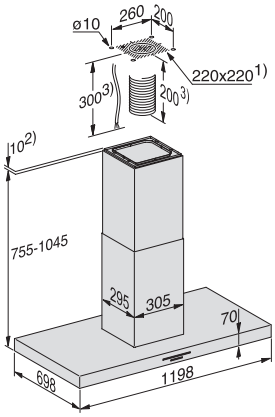

DA 4248 VD (Installation drawing)

1) Installation area/site, 2) Installation alternatively with spacer frame, 3) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.