DA 4298 W Puristic Plus
Wall mounted cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



- Timeless design – stainless steel canopy 898 mm wide
- Unique user convenience – Con@ctivity
- Powerful – 630 m3/h in Booster level
- Pleasantly quiet – Miele Silence package
- Safe and easy to clean – Miele CleanCover

EAN: 4002515935798 / Material number: 10749580 / Old Material Number: 28429850D

General information	
Model identifier	DA 4298 W Puristic Plus
Manufacturer material number	10749580
EAN number	4002515935798
Marketing class	Gold
Construction type	
Wall mounted cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
Active charcoal filter (order separately)	DKF 12-P
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Controls	Light-touch switches with LEDs
Miele@mobile app	•
Power levels (number without Booster level)	3
Run-on time 5/15 min.	•
Booster levels	1
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Silence package	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A++
Annual energy consumption in kWh/year	26,7
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	26,7
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	3 x 3 W
Light intensity in Lx	670 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m^3/h) according to EN 61591	190

DA 4298 W Puristic Plus
Wall mounted cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515935798 / Material number: 10749580 / Old Material Number: 28429850D

Air throughput in Level 2 (m^3/h) according to EN 61591	290
Air throughput in Level 3 (m^3/h) according to EN 61591	390
Air throughput in Booster level 1 (m^3/h) according to EN 61591	630
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	36,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	45,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	64,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	21,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	30,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	37,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	49,0
Recirculation	
Air throughput in Level 1 (m^3/h) according to EN 61591	110
Air throughput in Level 2 (m^3/h) according to EN 61591	185
Air throughput in Level 3 (m^3/h) according to EN 61591	315
Air throughput in Booster level 1 (m^3/h) according to EN 61591	460
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	45,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	64,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	73,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	49,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	58,0
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	898
Overall hood height for extraction mode and external in mm	685–1005
Overall height for recirculation mode cooker hoods in mm	815–1135
Overall height for vented and external in in. (mm)	685
Overall height for extraction mode and external mode cooker hoods in mm	1005
Canopy height in mm	62

DA 4298 W Puristic Plus
Wall mounted cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515935798 / Material number: 10749580 / Old Material Number: 28429850D

Overall height for recirculation in in. (mm)	815
Canopy depth in mm	500
Overall height for recirculation mode cooker hoods in mm	1135
Net weight in kg	25,0
Length of supply lead in m	1,5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0,08
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Combination with WiFi-enabled Miele hob	recommended
Accessories included	
Non-return flap	•
Adapter to reduce ducting diameter from 150 mm to 125 mm Ø	•

DA 4298 W Puristic Plus
Wall mounted cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.

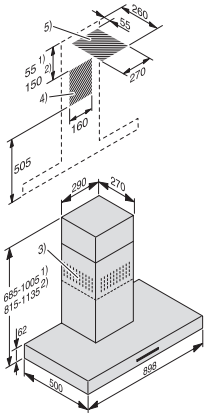

DA 4298 (Installation drawing)

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)