DAS 8630
Slimline cooker hood
with intuitive SmartControl White controls for installation in narrow wall units

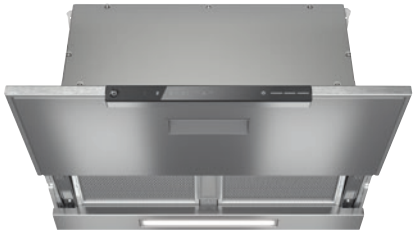

- Intricate design – flat stainless steel panel, 60 cm wide
- Unique user convenience – Con@ctivity
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516496083 / Material number: 11862300 /
Old Material Number: 28S8630SD

General information	
Model identifier	DAS 8630
Manufacturer material number	11862300
EAN number	4002516496083
Marketing class	Platinum
Construction type	
Slimline cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 31-P, DKF 31-R
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Touch-on-glass controls	•
Power levels (number without Booster level)	3
Run-on time 5/15 min.	•
Booster levels	2
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A+
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	27,2
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	1 x 3 W
Light intensity in Lx	300 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m^3/h) according to EN 61591	180
Air throughput in Level 2 (m^3/h) according to EN 61591	270
Air throughput in Level 3 (m^3/h) according to EN 61591	380
Air throughput in Booster level 1 (m^3/h) according to EN 61591	600

DAS 8630
Slimline cooker hood
with intuitive SmartControl White controls for installation in narrow wall units

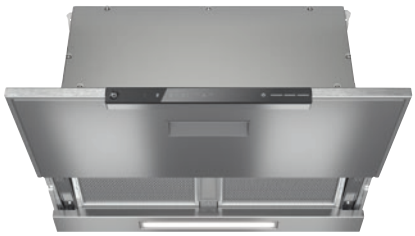

EAN: 4002516496083 / Material number: 11862300 / Old Material Number: 28S8630SD

Air throughput in Booster level 2 (m^3/h) according to EN 61591	810
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	37,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	45,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	63,0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	71,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	23,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	31,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	49,0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
Recirculation	
Air throughput in Level 1 (m^3/h) according to EN 61591	160
Air throughput in Level 2 (m^3/h) according to EN 61591	260
Air throughput in Level 3 (m^3/h) according to EN 61591	405
Air throughput in Booster level 1 (m^3/h) according to EN 61591	600
Air throughput in Booster level 2 (m^3/h) according to EN 61591	685
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	41,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	50,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	71,0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	74,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	27,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	36,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	47,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	61,0
Safety	
Safety switch-off	•

DAS 8630
Slimline cooker hood
with intuitive SmartControl White controls for installation in narrow wall units

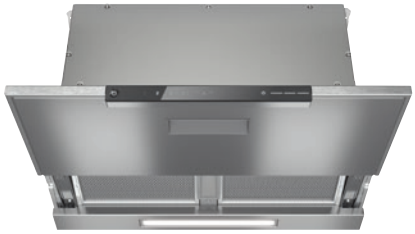

EAN: 4002516496083 / Material number: 11862300 /
Old Material Number: 28S8630SD

Technical data	
Canopy width in mm	561
Canopy height in mm	60
Canopy depth in mm	307
Net weight in kg	13,0
Length of supply lead in m	1,5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0,23
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Fitting template	•
Accessories included	
Non-return flap	•

DAS 8630

Slimline cooker hood

with intuitive SmartControl White controls for installation in narrow wall units

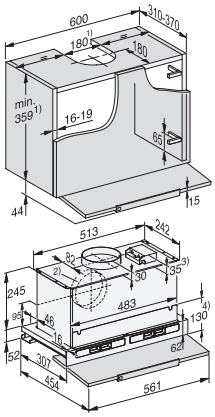

DAS8630, Installation drawings

1) Extraction, recirculation with conversion kit DUU 150., 2) Alternative ducting connection to the rear., 3) Accessory DSM module., 4) The wall unit can be fitted with a partition after installation. The slots for the grease filters and, in recirculation mode, for the odor filters must remain accessible., , The height of the wall unit and the cut-out dimensions must take into account any accessories fitted (e.g. silencer, recirculation hood conversion kit, DSM module)