DA 9299 W Screen blbo
Wall mounted cooker hood
with exclusive Blackboard glass front and intuitive SmartControl operation



- Linear design with width of 880 mm and depth of just 256 mm
- Unique user convenience – Con@ctivity
- Fold-out front panel – for optimum extraction
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter

EAN: 4002516788676 / Material number: 12506080 / Old Material Number: 28929970D

General information	
Model identifier	DA 9299 W Screen blbo
Manufacturer material number	12506080
EAN number	4002516788676
Marketing class	Gold
Construction type	
Wall mounted cooker hood	•
Construction type and design	
Colour	Blackboard
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKF 29
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Touch controls	•
Controls	Touch-on-glass controls
Power levels (number without Booster level)	3
Run-on time 5/15 min.	•
Booster levels	2
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Silence package	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A+++
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	21,3
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	C
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	1 x 3,0 W
Light intensity in Lx	350 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m^3/h) according to EN 61591	210
Air throughput in Level 2 (m^3/h) according to EN 61591	300
Air throughput in Level 3 (m^3/h) according to EN 61591	415
Air throughput in Booster level 1 (m^3/h) according to EN 61591	650

DA 9299 W Screen blbo
Wall mounted cooker hood
with exclusive Blackboard glass front and intuitive SmartControl operation



EAN: 4002516788676 / Material number: 12506080 / Old Material Number: 28929970D

Air throughput in Booster level 2 (m³/h) according to EN 61591	915
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	38,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	46,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	63,0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	70,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	23,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	31,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	48,0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	56,0
Recirculation	
Air throughput in Level 1 (m³/h) according to EN 61591	175
Air throughput in Level 2 (m³/h) according to EN 61591	270
Air throughput in Level 3 (m³/h) according to EN 61591	420
Air throughput in Booster level 1 (m³/h) according to EN 61591	620
Air throughput in Booster level 2 (m³/h) according to EN 61591	715
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	40,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	49,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	59,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	68,0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	71,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	26,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	34,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	44,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	54,0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
Safety	
Safety switch-off	•
Single-ply safety glass (ESG)	•

DA 9299 W Screen blbo
Wall mounted cooker hood
with exclusive Blackboard glass front and intuitive SmartControl operation



EAN: 4002516788676 / Material number: 12506080 / Old Material Number: 28929970D

Technical data	
Canopy width in mm	880
Overall hood height for extraction mode and external in mm	500
Overall height for recirculation mode cooker hoods in mm	500
Overall height for vented and external in in. (mm)	500
Overall height for extraction mode and external mode cooker hoods in mm	500
Canopy height in mm	500
Overall height for recirculation in in. (mm)	500
Canopy depth in mm	260
Overall height for recirculation mode cooker hoods in mm	500
Net weight in kg	20,0
Length of supply lead in m	1,5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0,23
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Accessories included	
Non-return flap	•
Deflector for recirculation	•

DA 9299 W Screen blbo
Wall mounted cooker hood
with exclusive Blackboard glass front and intuitive SmartControl operation

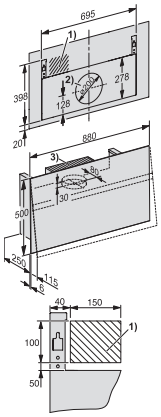

DA9298W, DA9299W Screen Reference, Installation drawings

1) Installation area for power connection., 2) Cut-out when ducting to the rear., 3) Air vent for recirculation mode. A distance of at least 200 mm must be maintained between the top of the appliance and the ceiling or any furniture units installed above the appliance.