DA 6698 W Puristic Edition 6000
Wall mounted cooker hood
with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – 640 m3/h in Booster level
- Energy-efficient and quiet – powerful ECO motor
- Pleasantly quiet – Miele Silence package

EAN: 4002515935996 / Material number: 10749650 /
Old Material Number: 28669850D

General information	
Model identifier	DA 6698 W Puristic Edition 6000
Manufacturer material number	10749650
EAN number	4002515935996
Marketing class	Diamond
Construction type	
Wall mounted cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
Active charcoal filter (order separately)	DKF 12-P
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Yes
Touch controls	•
Controls	Touch-on-glass controls
Miele@mobile app	•
Power levels (number without Booster level)	3
Run-on time 5/15 min.	•
Booster levels	1
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Silence package	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A++
Annual energy consumption in kWh/year	24,6
ECO motor (DC motor)	•
PowerManagement system	•
Annual energy consumption in kWh/year	24,6
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	3 x 3 W
Light intensity in Lx	670 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•

DA 6698 W Puristic Edition 6000
Wall mounted cooker hood
with energy-efficient LED lighting and touch controls for simple operation.



EAN: 4002515935996 / Material number: 10749650 /
Old Material Number: 28669850D

Exhaust air	
Air throughput in Level 1 (m^3/h) according to EN 61591	200
Air throughput in Level 2 (m^3/h) according to EN 61591	300
Air throughput in Level 3 (m^3/h) according to EN 61591	400
Air throughput in Booster level 1 (m^3/h) according to EN 61591	640
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	36,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	63,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	21,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	29,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	37,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	48,0
Recirculation	
Air throughput in Level 1 (m^3/h) according to EN 61591	110
Air throughput in Level 2 (m^3/h) according to EN 61591	185
Air throughput in Level 3 (m^3/h) according to EN 61591	315
Air throughput in Booster level 1 (m^3/h) according to EN 61591	460
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	45,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	63,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	72,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
Safety	
Safety switch-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in mm	898
Overall hood height for extraction mode and external in mm	710–1030
Overall height for recirculation mode cooker hoods in mm	840–1160
Overall height for vented and external in in. (mm)	710

DA 6698 W Puristic Edition 6000
Wall mounted cooker hood
with energy-efficient LED lighting and touch controls for simple operation.



EAN: 4002515935996 / Material number: 10749650 /
Old Material Number: 28669850D

Overall height for extraction mode and external mode cooker hoods in mm	1030
Canopy height in mm	85
Overall height for recirculation in in. (mm)	840
Canopy depth in mm	500
Overall height for recirculation mode cooker hoods in mm	1160
Net weight in kg	26,0
Length of supply lead in m	1,5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0,08
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Combination with WiFi-enabled Miele hob	recommended
Accessories included	
Non-return flap	•

DA 6698 W Puristic Edition 6000
Wall mounted cooker hood
with energy-efficient LED lighting and touch controls for simple operation.

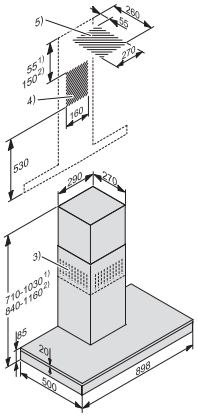

DA 6698 W, CLST (Installation drawing)

1. Extraction, 2. Recirculation, 3 Ventilation grilles at the top for recirculation, 4. + 5. Vent cut-out positions (Area 5 not required for recirculation)