PUR 98 D
Island cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



- Timeless design – stainless steel canopy 898 mm wide
- Powerful – 650 m3/h in Booster level
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation

EAN: 4002515712214 / Material number: 10351380 / Old Material Number: 28410857D

General information	
Model identifier	PUR 98 D
Manufacturer material number	10351380
EAN number	4002515712214
Marketing class	Silver
Construction type	
Island cooker hood	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUI 32
Active charcoal filter (order separately)	DKF 12-P
User convenience	
Electronic controls	•
Controls	Light-touch switches with LEDs
Power levels (number without Booster level)	3
Booster levels	1
Easy-to-clean canopy interior – CleanCover	•
Efficiency	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	51,8
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
Number x W	4 x 3 W
Light intensity in Lx	500 lx
Colour temperature in K	3000 Kelvin
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m^3/h) according to EN 61591	280
Air throughput in Level 2 (m^3/h) according to EN 61591	330
Air throughput in Level 3 (m^3/h) according to EN 61591	400
Air throughput in Booster level 1 (m^3/h) according to EN 61591	650
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	48,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	57,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	69,0

PUR 98 D
Island cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515712214 / Material number: 10351380 / Old Material Number: 28410857D

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	31,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	35,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	39,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	51,0
Recirculation	
Air throughput in Level 1 (m^3/h) according to EN 61591	190
Air throughput in Level 2 (m^3/h) according to EN 61591	270
Air throughput in Level 3 (m^3/h) according to EN 61591	330
Air throughput in Booster level 1 (m^3/h) according to EN 61591	460
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	57,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	62,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	66,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	73,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	40,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	45,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	49,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	56,0
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	898
Overall height for vented and external in in. (mm)	690
Overall height for extraction mode and external mode cooker hoods in mm	990
Canopy height in mm	70
Overall height for recirculation in in. (mm)	750
Canopy depth in mm	598
Overall height for recirculation mode cooker hoods in mm	1060
Net weight in kg	34,0
Hard-wired connection	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0,23
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50

PUR 98 D
Island cooker hood
with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515712214 / Material number: 10351380 / Old Material Number: 28410857D

Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Accessories included	
Non-return flap	•

PUR 98 D

Island cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.

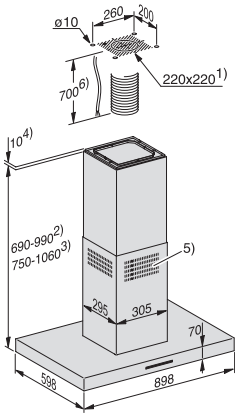

DA 410-6, DA 4208 D, DA 4208 D EXTA, DA 6396 D, DA 6596 D, PUR 98 D (Installation drawing)

1) Installation area/site, 2) Vented, 3) Recirculation, 4) Installation alternatively with spacer frame, 5) Ventilation grille positioned at the top for recirculation, 6) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.